

DAS MODUL

Ninside **RE**

Monocrystalline module

EN

Product range: 435-445w

Product: DMMXSCNi BB RE

Type: TopCon Halfcut Rectangle

445 W

MAXIMUM POWER OUTPUT

23%

MAXIMUM EFFICIENCY

MADE  **IN**
GERMANY



O-PID

PID control is optimized through a combination of high-quality materials, ensuring the absence of PID (Potential Induced Degradation) phenomenon.



LID Performance

Our Ni-RE cells are neutral to the LID (Light Induced Degradation) effect, with no boron-oxygen interaction, ensuring long-lasting performance.



Reliability

DAS MODUL is a mark of proven quality with over 10 years of experience in this range. We offer a 30-year warranty on both mechanical parts and performance.




Full Power

Das Modul Ni RE combines a compact format with an efficiency greater than 23%, providing maximum power in a reduced space.




SMBB

Soluxtec's Smart Wire technology enables Das Modul RE to optimize light capture, ensuring a consistent current flow for higher power output and improved energy efficiency.

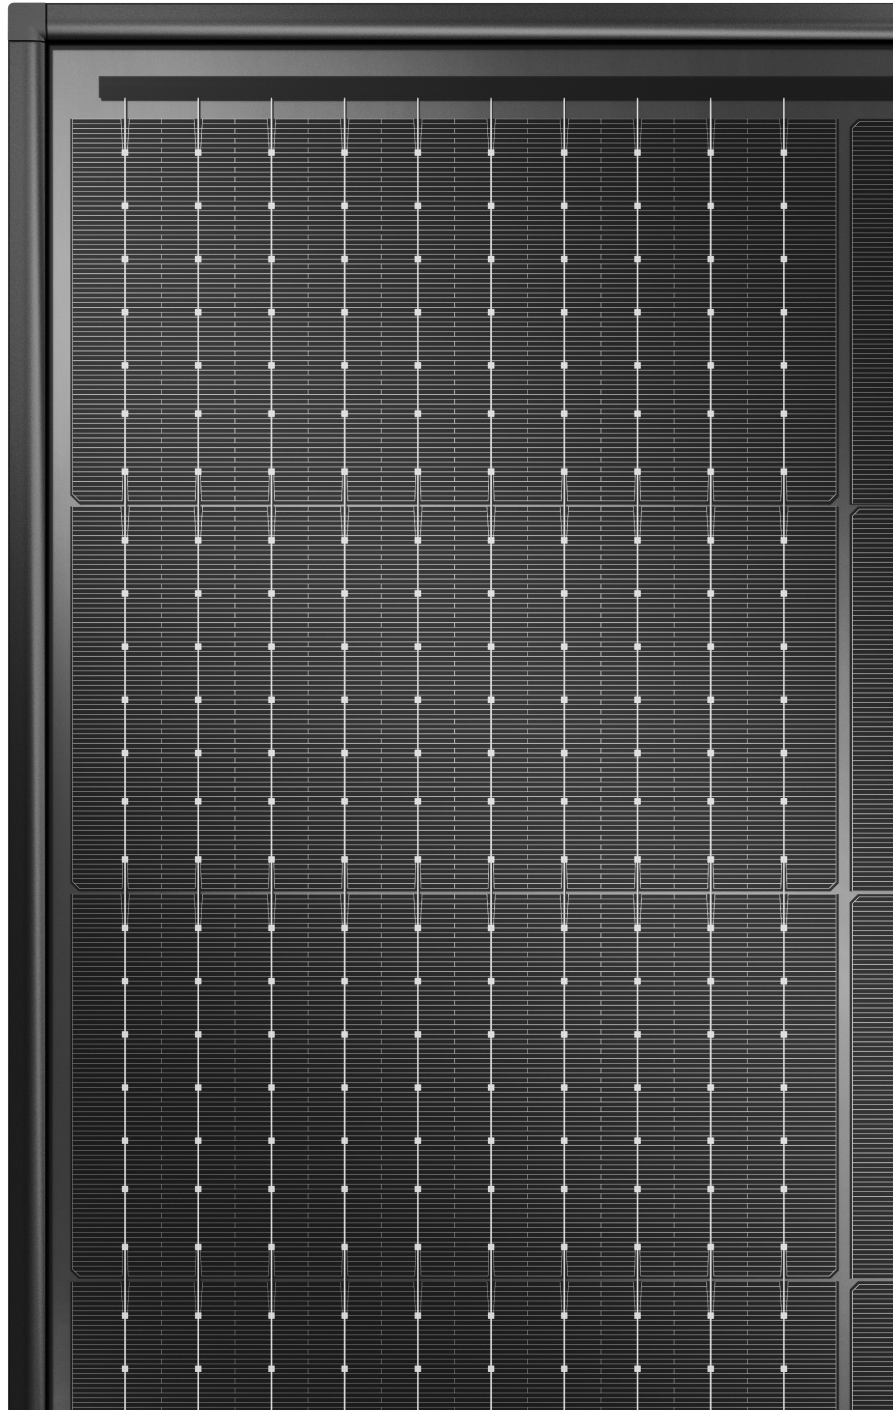

Soluxtec Solar's Performance Warranty

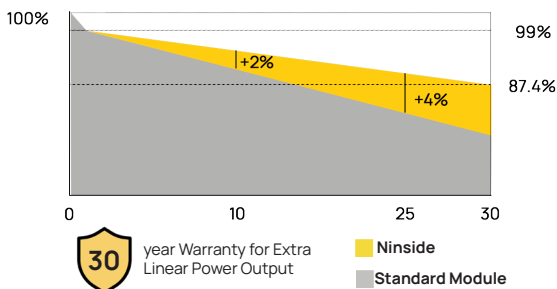

Comprehensive Products and System Certificates



- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environmental Management System
- ISO45001:2018: Occupational health and safety management systems
- UNI 9177 : Fire test class 1
- HIR Class 4 by IBS

SOLUXTEC
Wir kennen Sonne

30 years
Product warranty

30 years
Linear Power Warranty

1%
First year degradation

0,4%
Annual Degradation
Over 30 Years

ELECTRICAL PARAMETERS UNDER STC CONDITIONS

Model	DMMXSCNi 435	DMMXSCNi 440	DMMXSCNi 445
Maximum Power Point (Pmax)*	435	440	445
Open Circuit Voltage (Voc)	38,66	38,83	39
Short Circuit Current (Isc)	14,09	14,17	14,25
Maximum Power Voltage (Vmpp)	32,56	32,74	32,92
Maximum Power Current (Impp)	13,36	13,44	13,52
Module Efficiency (%)	22,03	22,55	22,81
Power Tolerance (Wp)	0-4,99Wp		
Temperature coefficient TC Isc	+0,03%/°C		
Temperature coefficient TC Voc	-0,28%/°C		
Temperature coefficient TC Pmpp	-0,30%/°C		

(1000 w/m2, 25°C, +/- 2°C, AM=1,5 according to IEC 60904_3).

ELECTRICAL PARAMETERS UNDER NMOT CONDITIONS

Model	DMMXSCNi 435	DMMXSCNi 440	DMMXSCNi 445
Maximum Power Point (Pmax)	329	333	341
Open Circuit Voltage (Voc)	36,59	36,76	37,1
Short Circuit Current (Isc)	11,25	11,31	11,6
Maximum Power Voltage (Vmpp)	30,83	31,01	30,89
Maximum Power Current (Impp)	10,69	10,76	11,05

(800W/m2, NMOTAM=1,5)

OPERATING CONDITIONS

Max. Operating Voltage:	1500 Vdc
Protection Class:	Class II
Operating T° range:	- 40°C ... + 85°C
Max. Reverse Current:	25 A
STC 25°C:	+/- 2°C
NMOT 45° C:	+/- 2°C
Design load + (snow):	3600 PA
Maximum test load +:	5400 PA
Design load - (wind):	2666 PA
Maximum test load - :	4000 PA

MECHANICAL PROPERTIES

Dimensions :	1722 * 1133 * 30 mm
Weight :	21.5 kg +/- 3%
Cell :	108 demi-cellules Mono TOPCON N-TYPE
Junction Box :	IP 68, 3 diodes en pot
Connectors :	MC4 Evo2 ou Compatibles
Cables :	2 * 1200 mm
Solar Glass :	3.2 mm trempé ARC

PACKAGING

Per pallets :	34 modules
Per truck :	28 pallets
Pallet dimensions :	1775x1185x1260 mm
Pallet weight :	714 kg

