Material No.	Artikelbeschreibung / Article Description	Beschreibung / Description	Drehmoment / Torque
9535760000	FPC 30/40/13 TRSP	Deckelschraube / Lid Screw	0,8-1,0 Nm
2860620000	VG M16 - K68/15 5-10	Hutmutter / Cap Nut	2-3 Nm

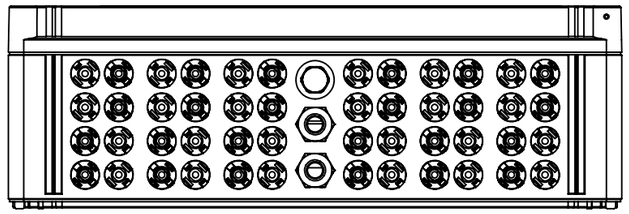

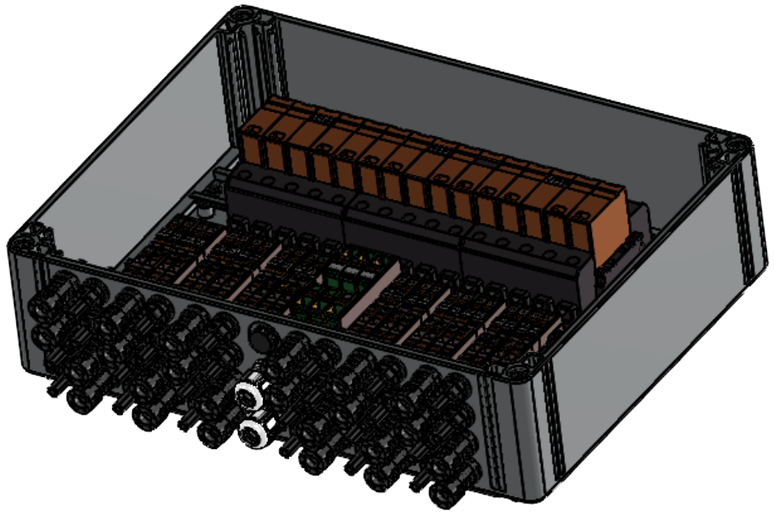

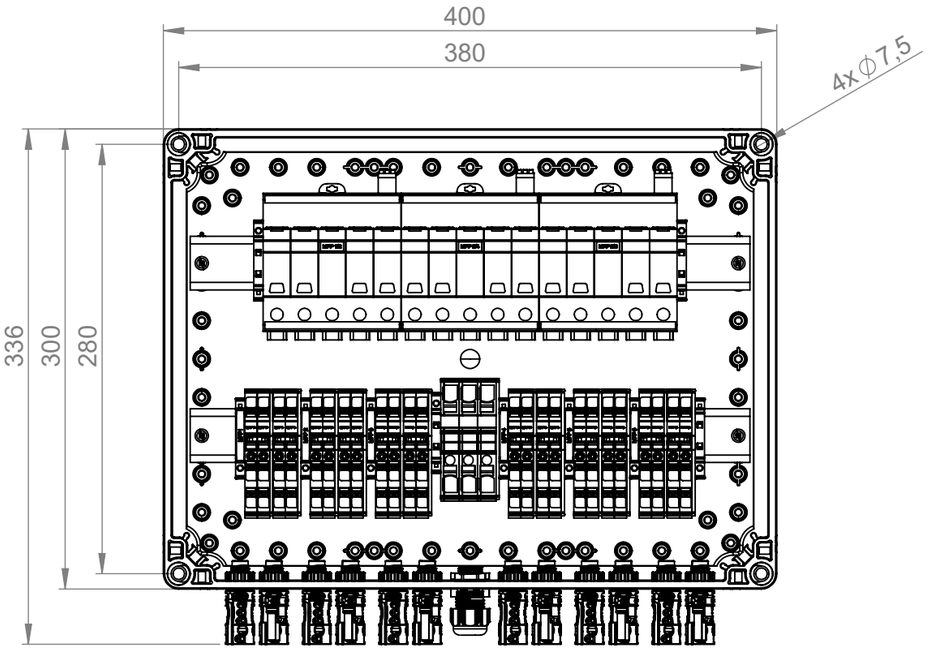

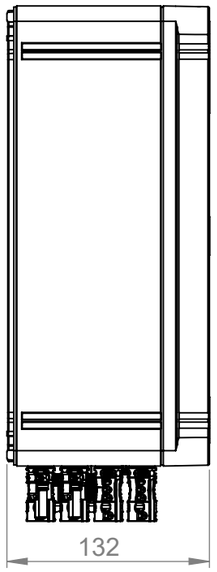

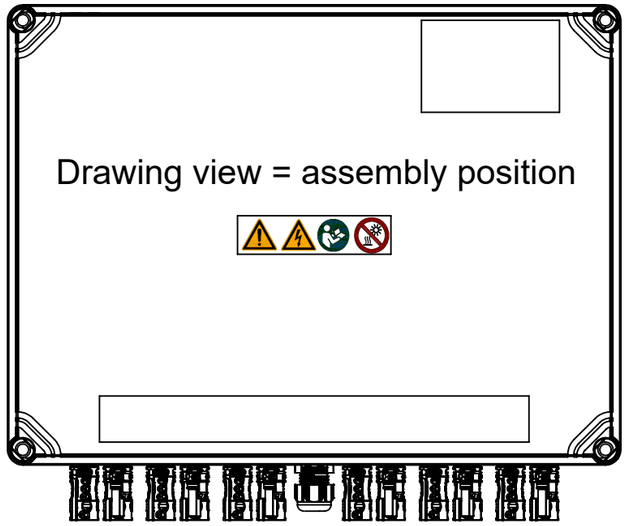

technical details:
Up to 6 MPPT (Maximum Power Point Tracking)
2x DC Input per MPPT
2x DC Output per MPPT

Connection type:
Plug-MC4-EVO2

Surge voltage arrester:
PV system voltage max.: 1100V DC
Requirements class: Type I+II
with remote contact

Rated DC voltage (Un): 1100 V
Rated DC current per input (Inc): 41 A
Rated short-time withstand current per input: 1.25 x Inc
Rated total DC current per MPPT (I out max.): 41 A
Operation ambient temperature: -20°C to +50°C
Degree of Protection: IP65, no direct sunlight

Montagefüße im Lieferumfang enthalten/ Mounting feet enclosed

Additional
Product Documents

Index	Brief Description	Date	Name
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

1.	-
2.	-

Tolerances: ISO 2768-mK

	Date	Name
Drawn	21.12.2023	wm00504
Checked		

Criterion for print: 1:4 A3

Customer:

Customer-No:

Weidmüller

Description:
PVC DC 2I 2O 6MPP SPD1R EVO 11

Drawing-No / Material-No: 8000132042
drw Index: 0
Sheet: 1 / 1

Customer Description: -

WEITERGABE SOWIE VERVIELFÄLTIGUNG DIESES DOKUMENTS, VERWERTUNG UND MITTEILUNG SEINES INHALTS SIND VERBOTEN, SOWEIT NICHT AUSDRÜCKLICH GESTATTET.
ZUWIDERHANDLUNGEN VERPFLICHTEN ZU SCHADENSERSATZ. ALLE RECHTE FÜR DEN FALL DER PATENT-, GEBRAUCHSMUSTER- ODER GESCHMACKSMUSTEREINTRAGUNG VORBEHALTEN.
THE REPRODUCTION, DISTRIBUTION AND UTILISATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICID AUTHORIZATION IS PROHIBITED.
OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. WEIDMUELLER EXLUSIVELY RESERVES THE RIGHT TO FILE FOR PATENTS. UTILITY MODELS OR DESIGNS
WEIDMUELLER INTERFACE GmbH & Co. KG